


SMD TYPE SWITCHES | TACT SWITCHES



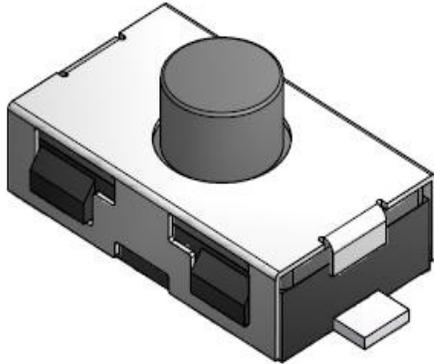


[1111]


Typical Specifications

1. Rating : DC12V 50mA
 2. Travel : 0.4 ± 0.15 mm
 3. Contact Resistance : 100m Ω Max.
 4. Bounce : 10m SEC MAX.
 5. Operating Force
 - * 1111-1 : 120 ± 50 gf [50,000Cycle]
 - * 1111-2 : 200 ± 50 gf [50,000Cycle]
 - * 1111-3 : 250 ± 50 gf [30,000Cycle]
- ▶ 6.0 X 3.8mm square thin type:2.5mm in height.
- ▶ Excellent clear click feeling due to tactile feedback characteristic.
- ▶ Reflow soldering applicable.
- ▶ Dust proof construction.
- ▶ Available for tape and reel package.
- ▶ Reflow soldering applicable.
- ▶ Operating push-button switches for portable Phone, Car Audio.

OUTLINE DRAWING

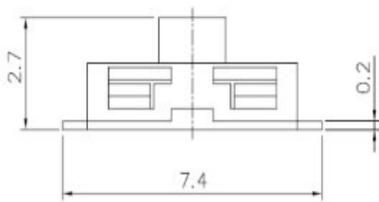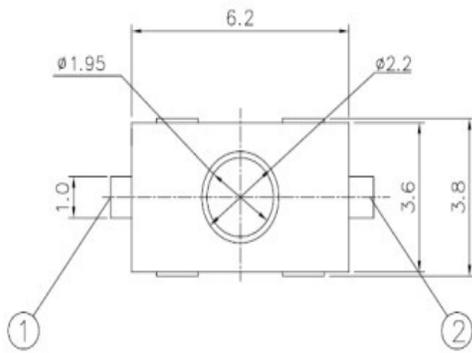

CIRCUIT DIAGRAM



P.C.B MOUNTING PATTERN

